


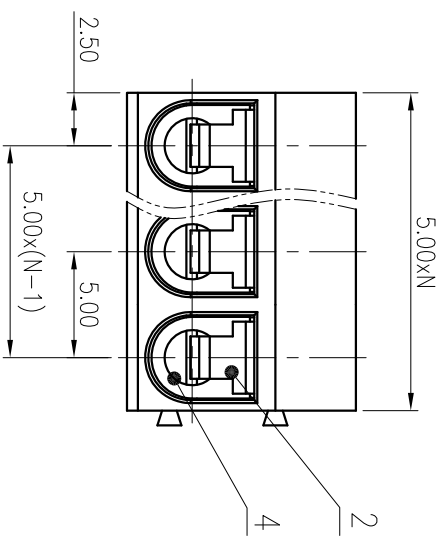
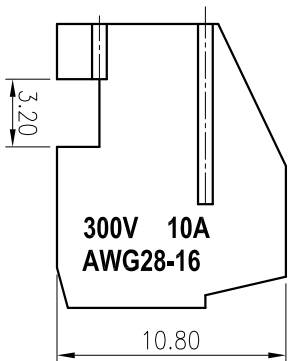


标注公差/General tolerances(mm)		
0	>3	>10
3	~	~
6	10	18
10	30	50
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.80	±0.93
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50
0.1/10	0.1/10	0.1/10
±Z	±Z	±Z

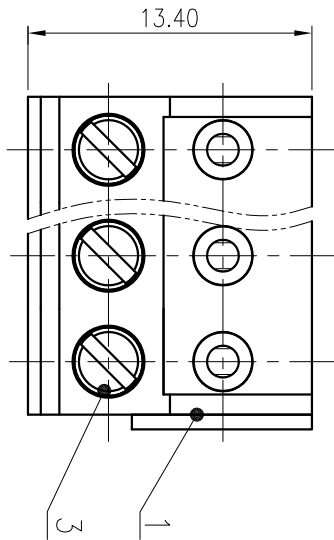

4	Cage	Copper alloy	M2.5/Ni plated
3	Screw	Steel	M2.5/Zn plated
2	Clamp	Copper alloy	Ni plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准:	UL Standard:	B	C
额定电压/Rated Voltage(V)	Current(A)	300/10	/
EC 标准/IEC Standard:	过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2
额定电压/Rated Voltage(V)	Current(A)	/	250/12
工频耐压/Withstanding voltage(V/1Min)	AC2000		
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M2.5, 0.4/3.54		
绞合范围(硬线和软线)/Wire Range(rigid and flexible) (mm ² /AWG)	0.2~1.5/28~16		
间距/Pitch(mm)/绞合范围/Poles	5.0/N=02~12P		
剥线长度/Stripping length(mm)	5-6		
使用温度范围/Operating temperature(°C)	-30~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:

SURFACE:

MAT NO.: /
 STATUS: /
 APPD:lan CHH 2020.05.20
 CHKD:Yu JZh 2020.05.20
 DRT: LIUM 2005.10.18

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG332K-5.0-C02
 TYPE: CUSTOMER DRAWING
 SCALE: 3:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE
1				

SIZE	UNIT
A4	mm

TYPE	SCALE	SHEET
CUSTOMER DRAWING	3:1	1/1