


Pin Hole Layout  
(Jack Bottom View)

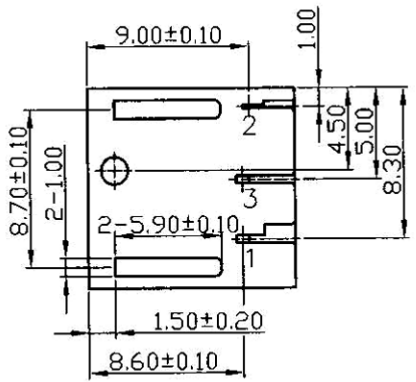

6.	Pin(2.0φ)	Copper	1	Nickel Plated
5.	Cover	PBT	1	Black Color
4.	Housing	PBT	1	Black Color
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T TicuR1-M-EH	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

SHALLIN ELECTRONICS CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	03.03.2006	易愛娣	蔡若	李	

PART NAME : DC POWER JACK PART NUMBER: **K375L** VERSION:3.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED UNIT:mm SCALE:1/1

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension