

NOTES:

1. ALL TOLERANCE ARE ± 0.10 (MM)

2. ELECTRICAL:





UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 500 MEGOHMS.
TERMINATION RESISTANCE: 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING

3. MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH: 20 lbs (89N) MIN.
DURABILITY: 200 MATING CYCLES.

4. MATERIAL: & FINISH:

HOUSING: POLYCARBONATE VL94V-2.
COLOR : CLEAR (CUSTOM COLOR AVAILABLE).
CONTACT: HIGH STRENGTH COPPER ALLOY.
GOLD PLATING OVER 100 MICRO INCH NICKEL.
CONDUCTOR: STRANDED. 24, 26, 28 AWG.

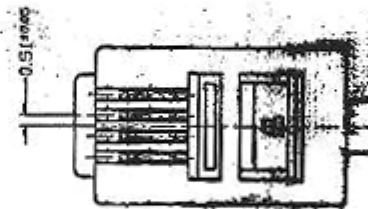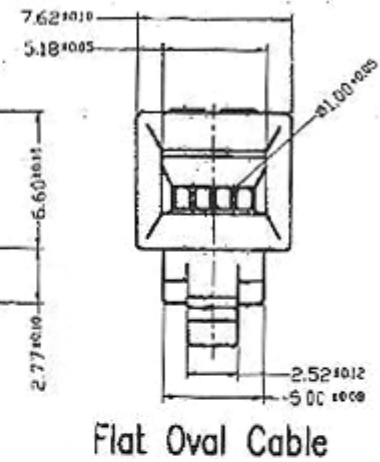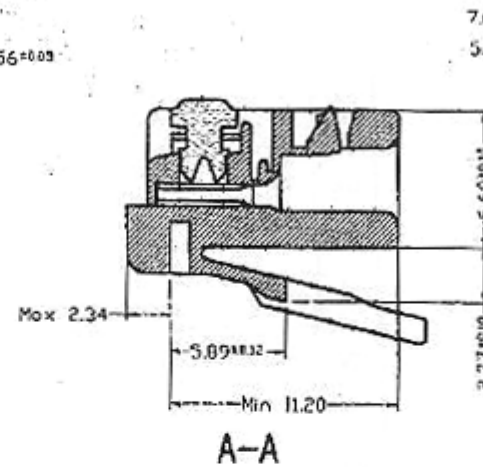

SHALLIN ELECTRONICS CO., LTD.

APPROVED	CHECKED	DESIGNER	PART NO	DWG NO
MATERIAL	SCALE 3.3:1	UNIT	FINISH	DATE 8/31/2001

X98044