


MATERIAL:

- HOUSING-PBT POLYESTER UL-94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH ON SOLDER AREA.
- SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

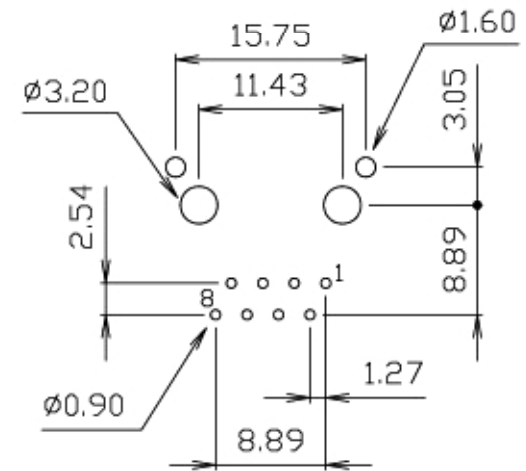

PCB LAYOUT Ref.

| | | | | | | | | | | | |
|------------------------|--|----------------|--|-----------------------------------|-------------|----------------------|------------|------------------------------------|--|---|---------|
| DO NOT SCALE DRAWING | | | | TOLERANCES UNLESS OTHERWISE NOTED | | DR. <i>M.L.HUANG</i> | | DATE OCT-12 '05 | | Shallin Electronics Co., Ltd. | |
| | | | | INCH | | MM | | CK'D <i>M.CHANG</i> | | | |
| THIRD ANGLE PROJECTION | | LINEAR | | MM | INCH | 00 ± .01 | 0.0 ± 0.25 | APP'D <i>W.J.YANG</i> | | TITLE RJ45, FLAT PIN, SHIELDED TOP ENTRY PCB JACK | |
| | | | | 000 ± .005 | 0.00 ± 0.13 | DATE OCT-13 '05 | | SCALE SIZE DWG.NO. X98139SB | | REV. 8 | SHEET 1 |
| | | ANGLE ± 0° 30' | | RADII | | + 0.40 | - 0.15 | | | | |