

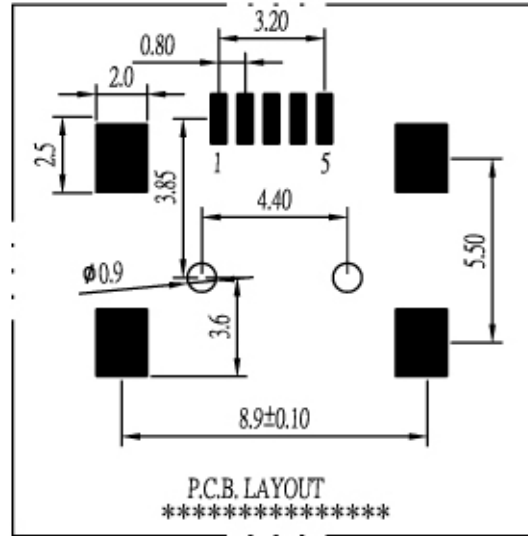
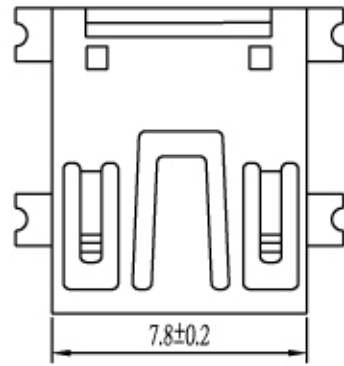
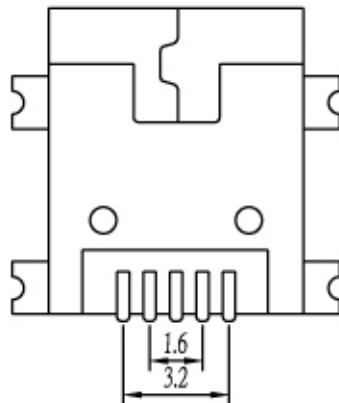


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REWISER	APPD

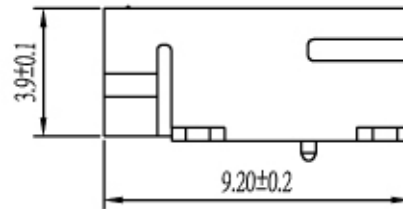

- Note:
- 1.Material:
- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
 - 1.2 Contact: Phosphor bronze,t=0.25mm
 - 1.3 Shell: Spcc,t=0.40mm
- 2.Specification:
- 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 1000 MΩ Min.
 - 2.5 Total mating force: 3.0 Kgf Max.
 - 2.6 Total unmating force: 0.5 Kgf Min.
 - 2.7 Temperature range: -55°C~85°C

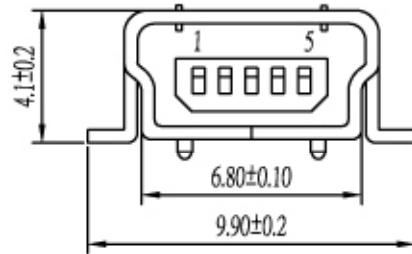

No.	Name	Q'ty	Part No.	Finish
8	Back-shell			
7	Front-shell			
6	Clip			No finish
5	Contact			Selective Au plated on mating area
4	Contact			
3	Contact			
2	Contact			
1	Housing			Black

PART NO:		MATERIAL:		Shallin Electronics Co., Ltd.	
MODEL NO:		FINISH:			
UNIT: mm	SIZE:	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: <i>YuHong</i>		MINIUSB-5PIN(F) S.M.T B TYPE	
.x	±0.3	CHK: <i>Nick</i>		DWG NO: Y98905	REV: A0
.xx	±0.20	APP: <i>Kent</i>		SCALE: 4:1	SHEET: 1 of 1
.xxx	±0.100				
ANG.	±1°				