



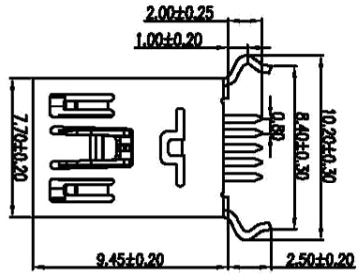


RoHS COMPLIANT


REVISIONS			
REV	ECN NO.	DESCRIPTION	DATE
A			2010-12-23

Product Specification

- 1.Material:
- 1.1 Insulator: BLACK PBT UL 94-V0 rated.
 - 1.2 Contact: Phosphor bronze,t=0.25mm.
 - 1.3 Shell: Brass,t=0.40mm.
- 2.Specification:
- 2.1 Current rating: 0.5 A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 minute.
 - 2.3 Contact resistance: 50 mW Max.
 - 2.4 Insulation resistance: 100 MW Min
 - 2.5 Temperature range: -55°C~+105°C



PCB LAYOUT



DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm <input type="checkbox"/> (INCH) <input type="checkbox"/> (mm) <input type="checkbox"/> ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DRAWN BY AND DATE JACK XIANG 07-16-09	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES .X ±0.38 [0.015] X* ±3° .X ±0.25 [0.010] .X* ±1.0° .XX ±0.13 [0.005]		CHECKED BY AND DATE JUSTIN XING 07-16-09 APPROVED BY AND DATE MICHAEL HUANG 07-16-09 THIRD ANGLE PROJECTION	
MATERIAL FINISH			
		SCALE: NONE	SIZE: A3

SHALLIN ELECTRONICS CO., LTD.	
TITLE	
MINI USB TYPE	
DRAWING NO. Y98907X	REV A
FILE NO.:	SHEET 1 OF 1