


REV.	DESCRIPTION	DATE
▲	合理化尺寸標注	12-21-01'
▲	圖面更新	03-14-02'
▲	尺寸更新	07-26-02'
▲	重新整理圖面	11-13-02'
▲	重新整理圖面	12-06-02'
▲	增加尺寸	12-15-02'

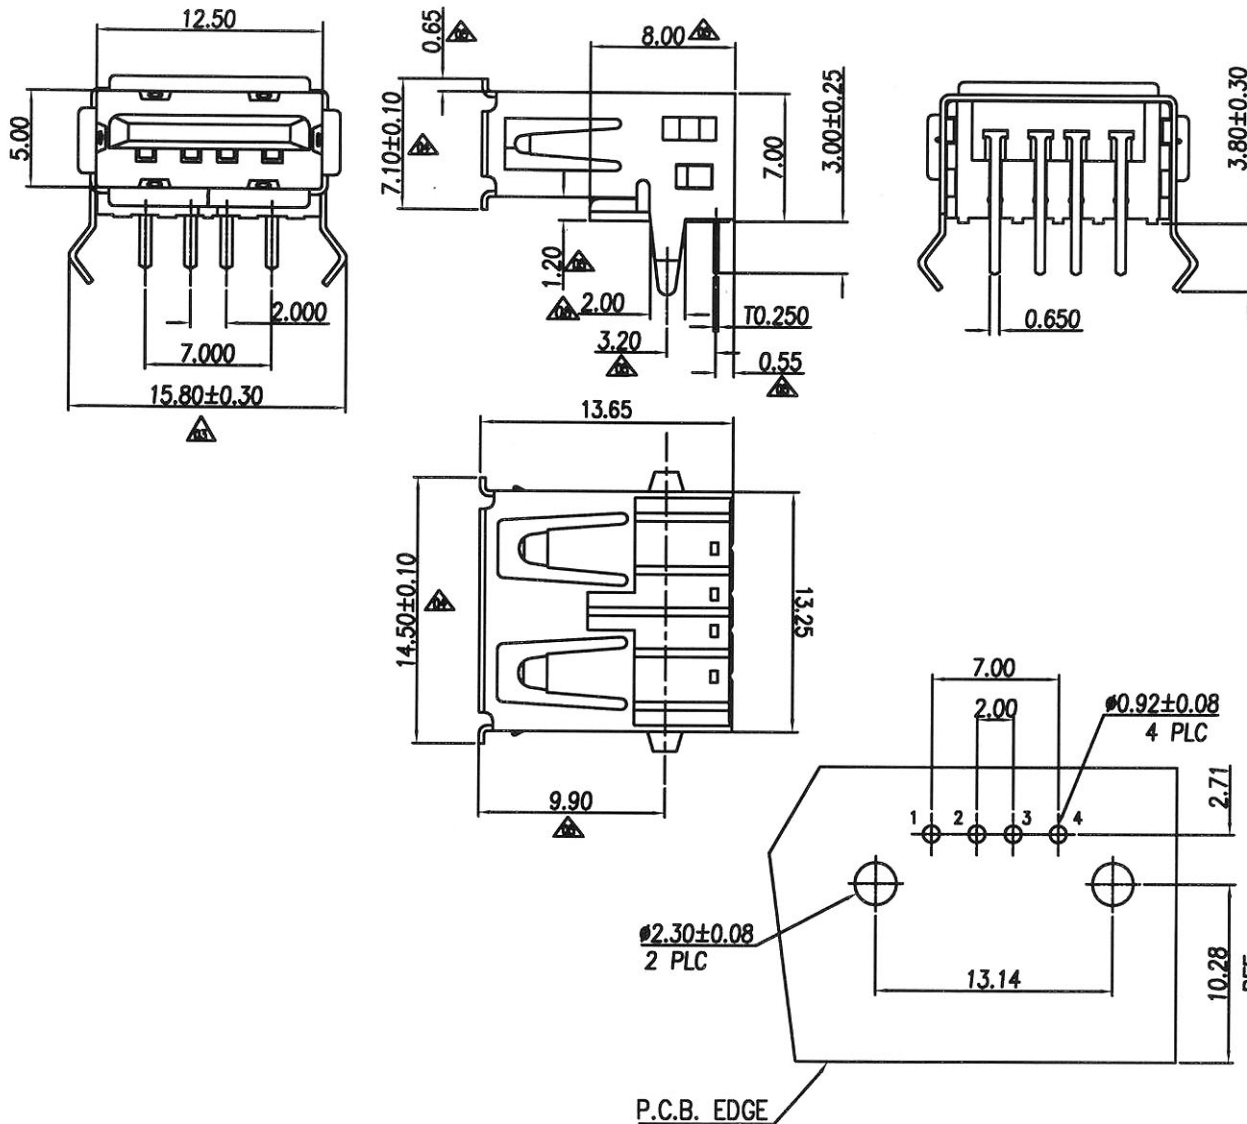

RECOMMEND P.C.B LAYOUT
(TOP VIEW)

特性: Specifications:

● 電器: Electrical:

- 接觸阻抗: Contact Resistance: 30 milliohms MAX.
- 耐電壓: Dielectric Withstanding Voltage: 500 V AC. AT Sea Level.
- 絕緣阻抗: Insulation Resistance: 1000 MEGA ohms MIN.

● 機構: Mechanical:

- 結合力: Mating Force: 4.0 KG MAX. 最大4kg.
- 拔出力: Unmating Force: 0.7 KG MIN. 最少0.7kg.

● 材料: Material:

- 塑膠: Housing: High Temperature Thermoplastics, UL 94V-0 耐高溫塑膠.
- 端子: Contact: Copper Alloy. 銅合金.
- 鐵殼: Shell : Copper Alloy. 銅合金.

● 電鍍: Finish:

- 端子: Contact : Plated Gold in Mating Area; Tin/Lead On Solder Tails. 接觸點鍍金. 腳鍍錫鉛.

● 鐵殼: Shell:

- Tin/Lead Plating. 鍍錫鉛
- Nickel Plating. 鍍鎳.

SHALLIN ELECTRONICS CO., LTD.

GENERAL TOLERANCE	
X.*(REF)±5°	X. ±
.X° ± 2°	.X ± 0.38
.XX° ± 1°	.XX ± 0.25
.XXX° ± 0.5°	.XXX ± 0.13

DRAWN	Y-M-Zou	DATE	12-15-02'
CHECK	Z-Y-He	DATE	12-17-02'
APPROVE	Y-C-Sung	DATE	12-17-02'

DWG. NO.	
PART NO.	Y99000

TITLE	USB4P A TYPE T/H 90° -FEMALE
-------	---------------------------------

REV.	06	UNIT	mm	SCALE	2:1
------	----	------	----	-------	-----

