
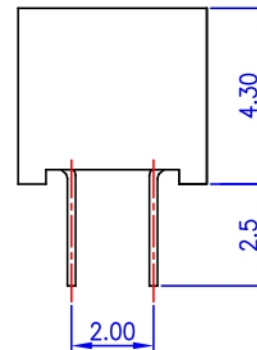
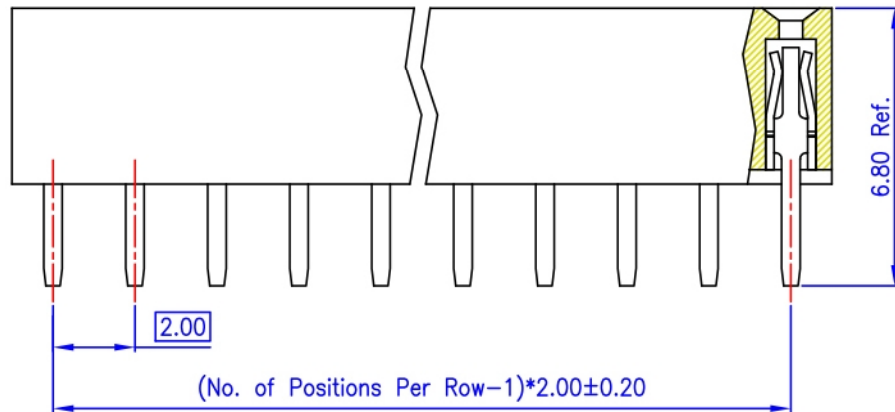
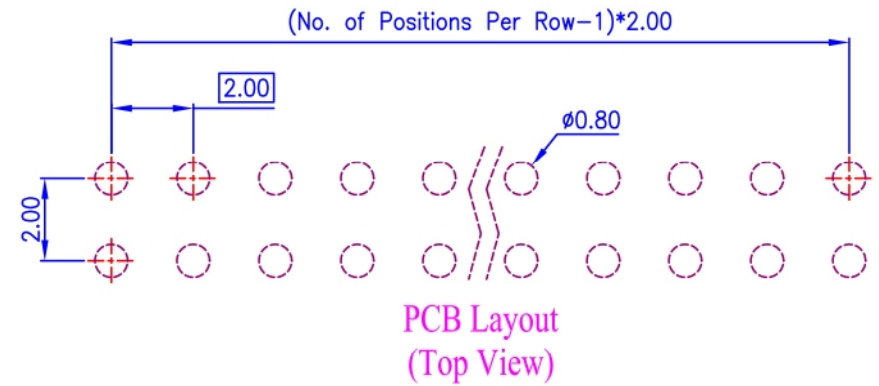


Rev.	Date	Description
A	2007/03/13	New Drawing

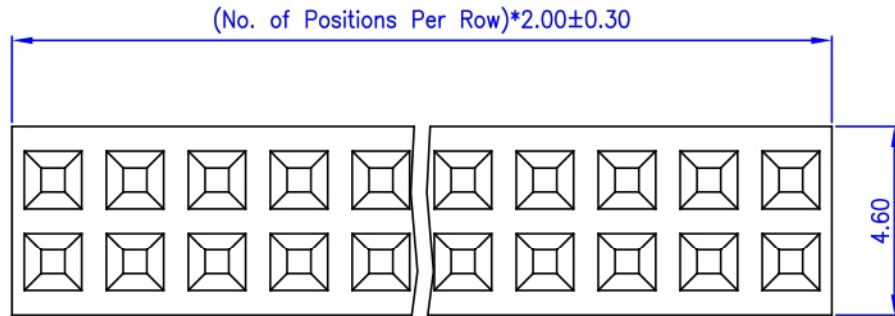

Shallin Electronics Co., Ltd.

**Material and Finish**

- Housing: Nylon 6T (UL94V-0), Black.
- Terminal: Copper Alloy (t=0.20mm), Gold Plating.

**Electrical Characteristics**

- Current Rating: 1.0 Amp. Max.
- Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
- Insulation Resistance: 1000M Ohms Min. at 500V DC.
- Connect Resistance: 30m Ohms Maximum.

**Mechanical Characteristics**

- Operating Temperature: -55°C ~ +105°C

Tolerance	Scale	Unit	Drawn By	Checked By	Approved By
0.0 ±0.30	1:1	mm	Sue	Baby	Alex
0.00 ±0.20					
0.000 ±0.10					
Drawing No. YTK2Nxx series					
Title 2.00mm Post Header Receptacle PCB Mount Vertical Type Dual Rows (H=4.30mm, W=4.60mm)					