

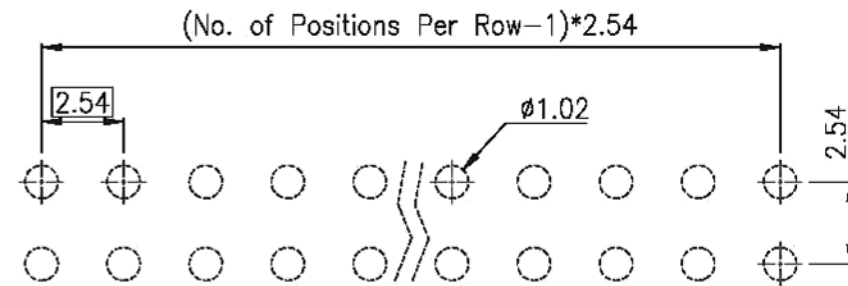
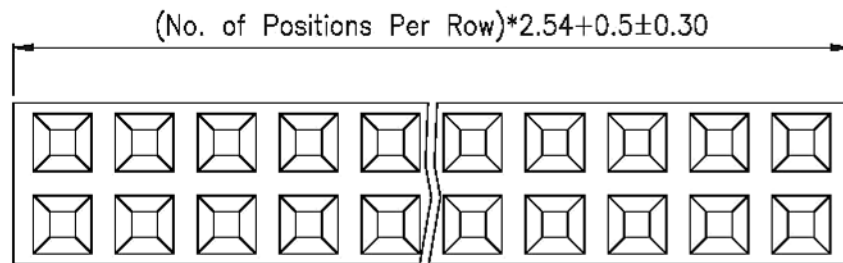


Rev.	Date	Description
A	2004/11/05	New Drawing
B	2006/08/14	Modify Drawing
C	2008/03/04	Add Terminal Options & Terminal Plating Options

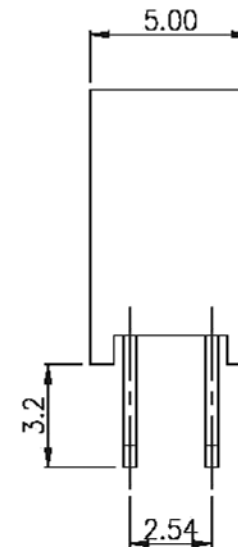

PCB Layout
(Top View)

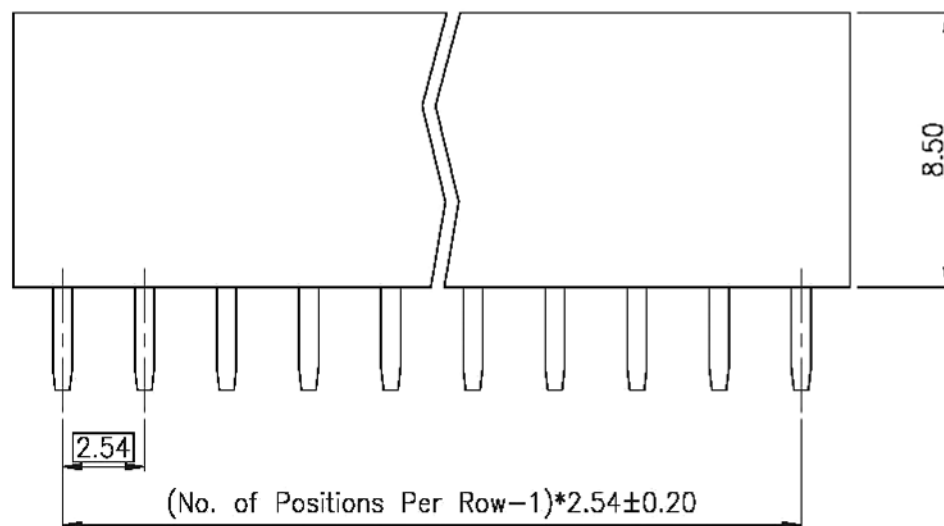

**SHALLIN ELECTRONICS CO.,
LTD.**

Material and Finish

- Housing: Thermoplastic (UL94V-0), Black.
- Terminal: Copper Alloy (t=0.40mm), Gold Plating.

Electrical Characteristics

- Current Rating: 3.0 Amp. Max.
- Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
- Insulation Resistance:
1000M Ohms Min. at 1000V DC.
- Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

- Operating Temperature: -55°C~+105°C

Dimension	Basic	Min	Max	Scale	Unit	Drawn By	Checked By	Approved By
0.0	±0.30			1:1	mm			
0.00	±0.20							
0.000	±0.10							

2.54mm Post Header Receptacle
PCB Mount Vertical Type
Dual Rows (H=8.50mm)