


2.00


3.9

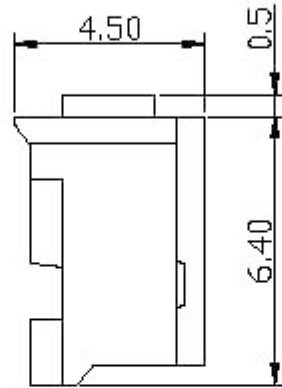

4.50

0.5

6.40

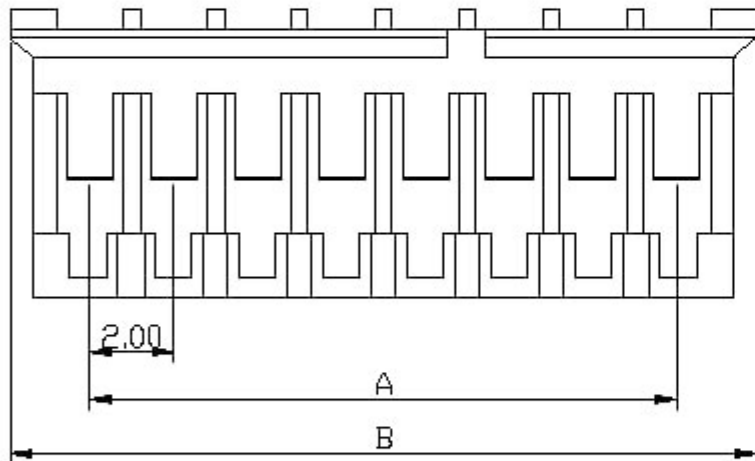

2.00

A

B

SPECIFICATIONS

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 100V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000MΩ / min.

Dielectric Withstanding Voltage: 800V AC/ min.

Contact Resistance: 20mΩ / max.

Material

Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	2.0(0.079)	5.8(0.228)
3	4.0(0.157)	7.8(0.307)
4	6.0(0.236)	9.8(0.386)
5	8.0(0.315)	11.8(0.465)
6	10.0(0.394)	13.8(0.543)
7	12.0(0.472)	15.8(0.622)
8	14.0(0.551)	17.8(0.701)
9	16.0(0.630)	19.8(0.780)
10	18.0(0.709)	21.8(0.858)
11	20.0(0.787)	23.8(0.937)
12	22.0(0.886)	25.8(1.016)
13	24.0(0.945)	27.8(1.094)
14	26.0(1.024)	29.8(1.173)
15	28.0(1.102)	31.8(1.252)
16	30.0(1.181)	33.8(1.331)

所有材料為
"環保材料"

2006.7.10

RoHS

YY01Cxx

SHALLIN
ELECTRONICS CO.,
LTD.

DESCRIPTION(內容):

2.0mm Wire-to-Board Housing

DRAWN(製圖):

miri

CHECKED(確認):

Mandy

GENERAL TOLERANCE:

(公差)

XXX ± 0.2

XX ± 0.3

REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

變更環保章字樣

DATE

2006.01.18

2006.07.10

2006.08.15

KEY NO:
料號:

DWG NO(圖號): 2000I-H

APPROVAL(核准):

Johnny

SCALE(比例):

Free



A

B

C

D

E